


FIG.1

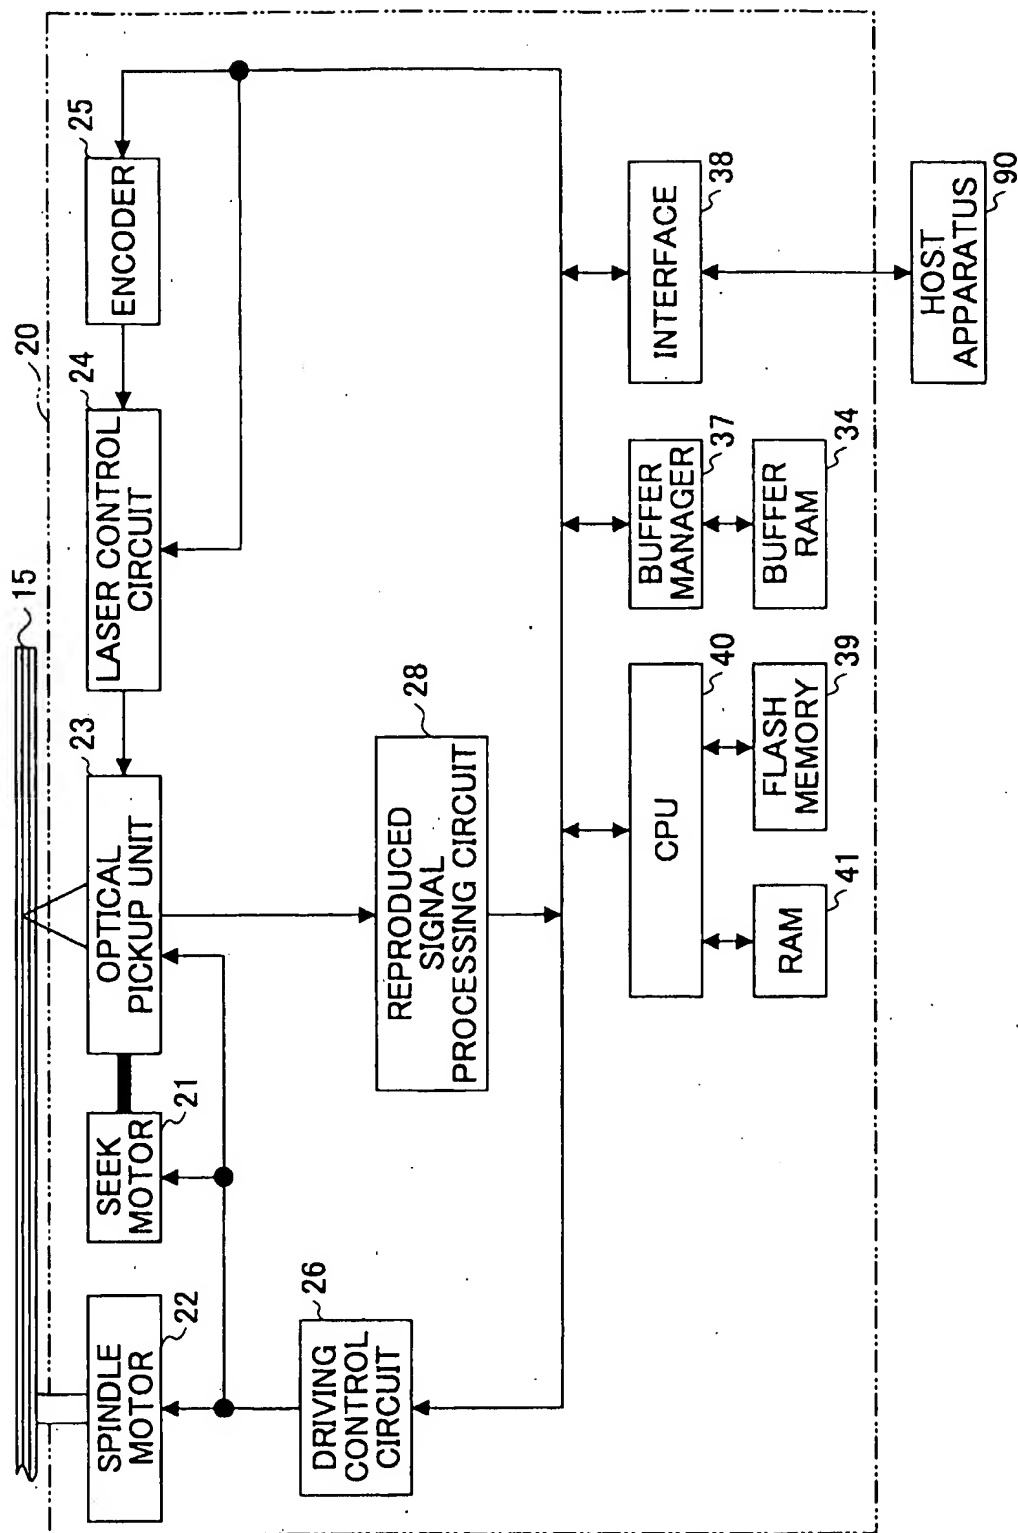

2/15

FIG.2

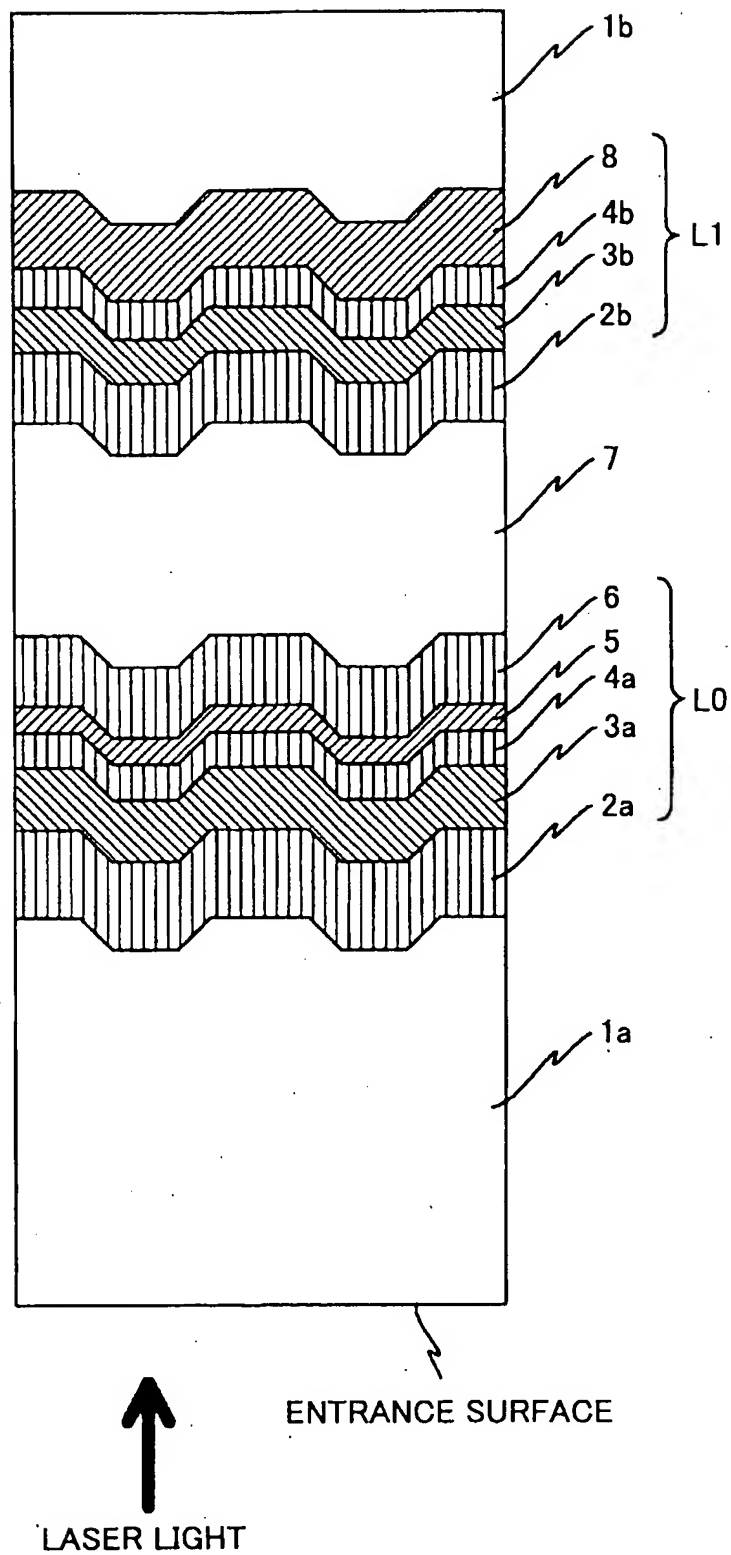


FIG.3A

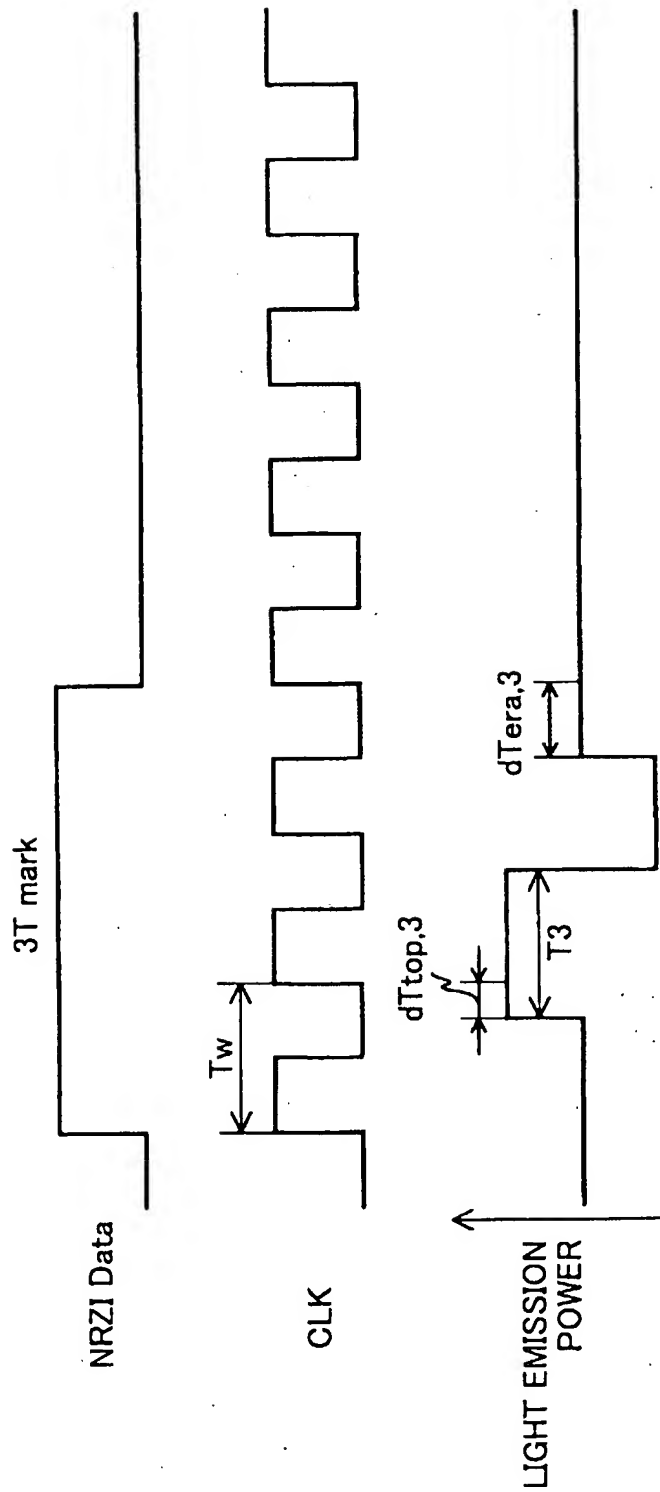


FIG.3B



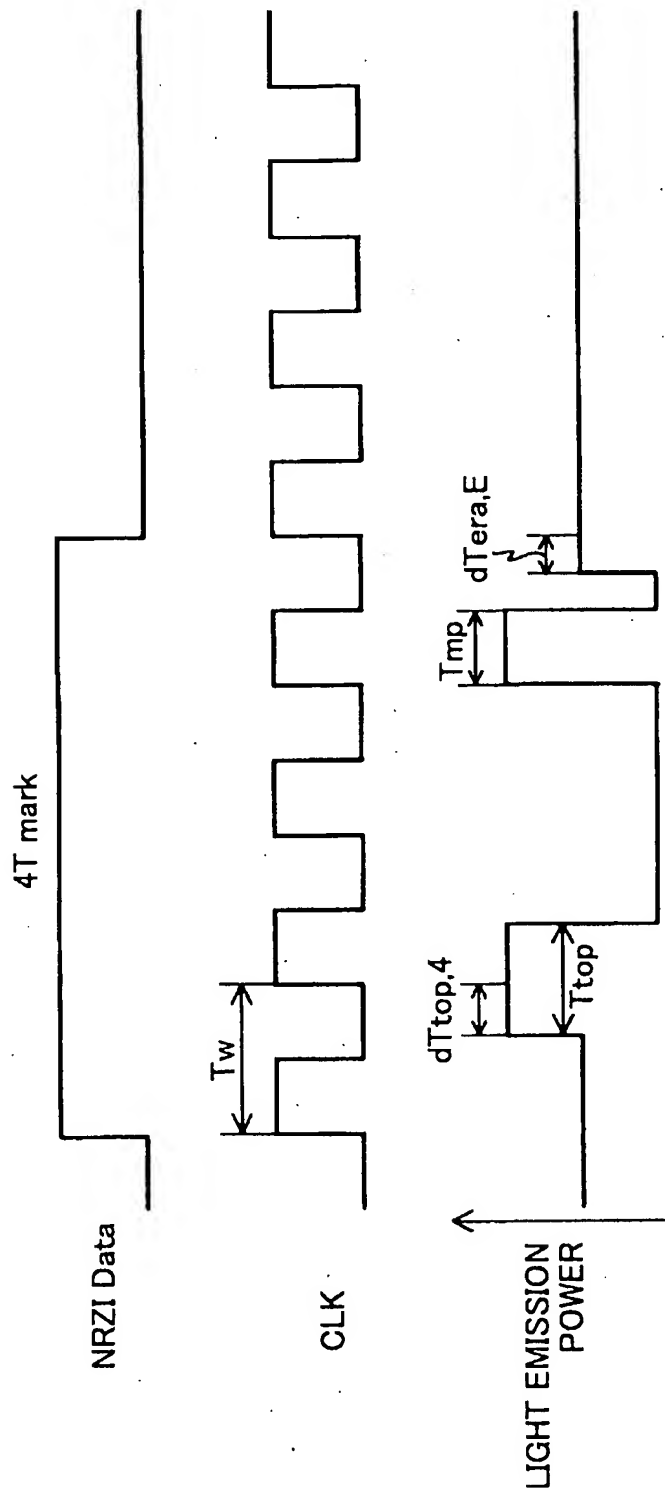


FIG.4A

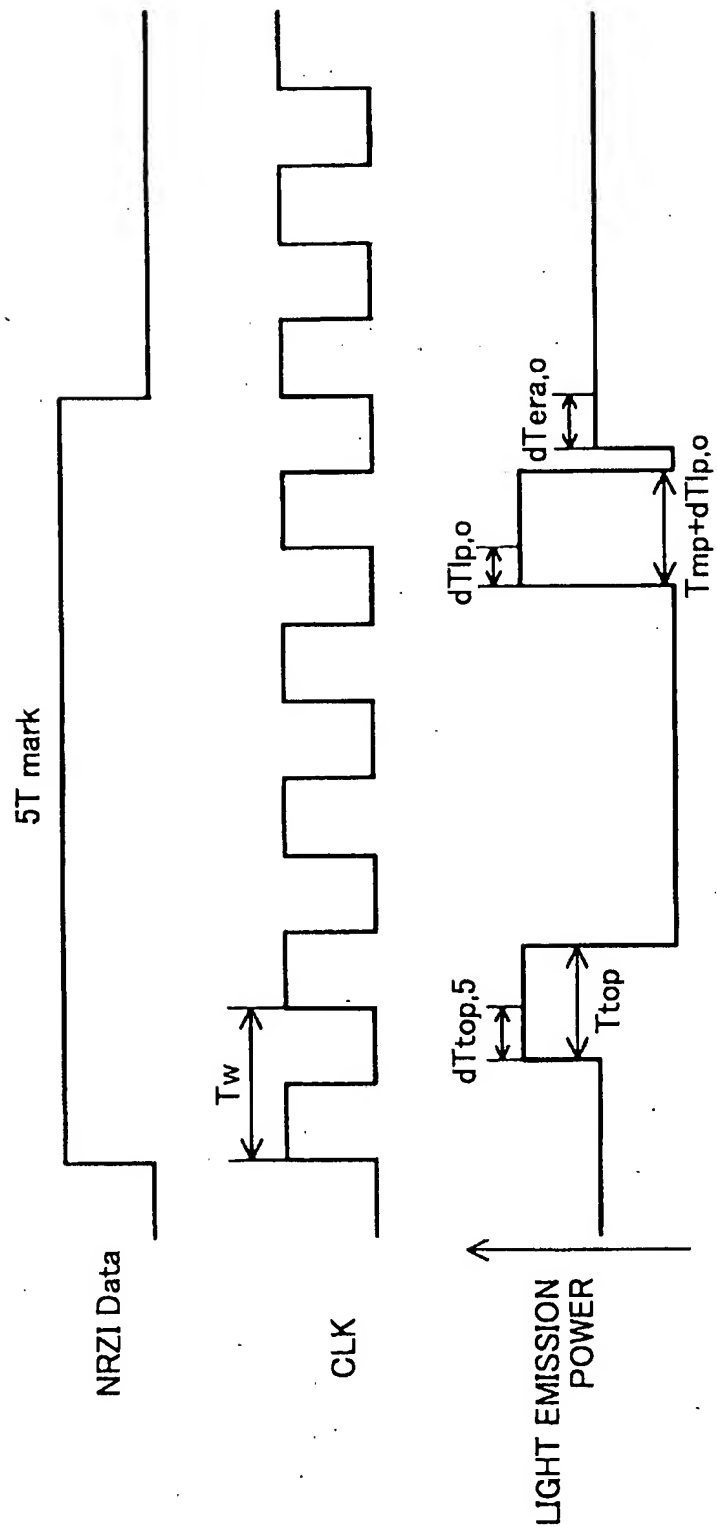

6/15


FIG.4B

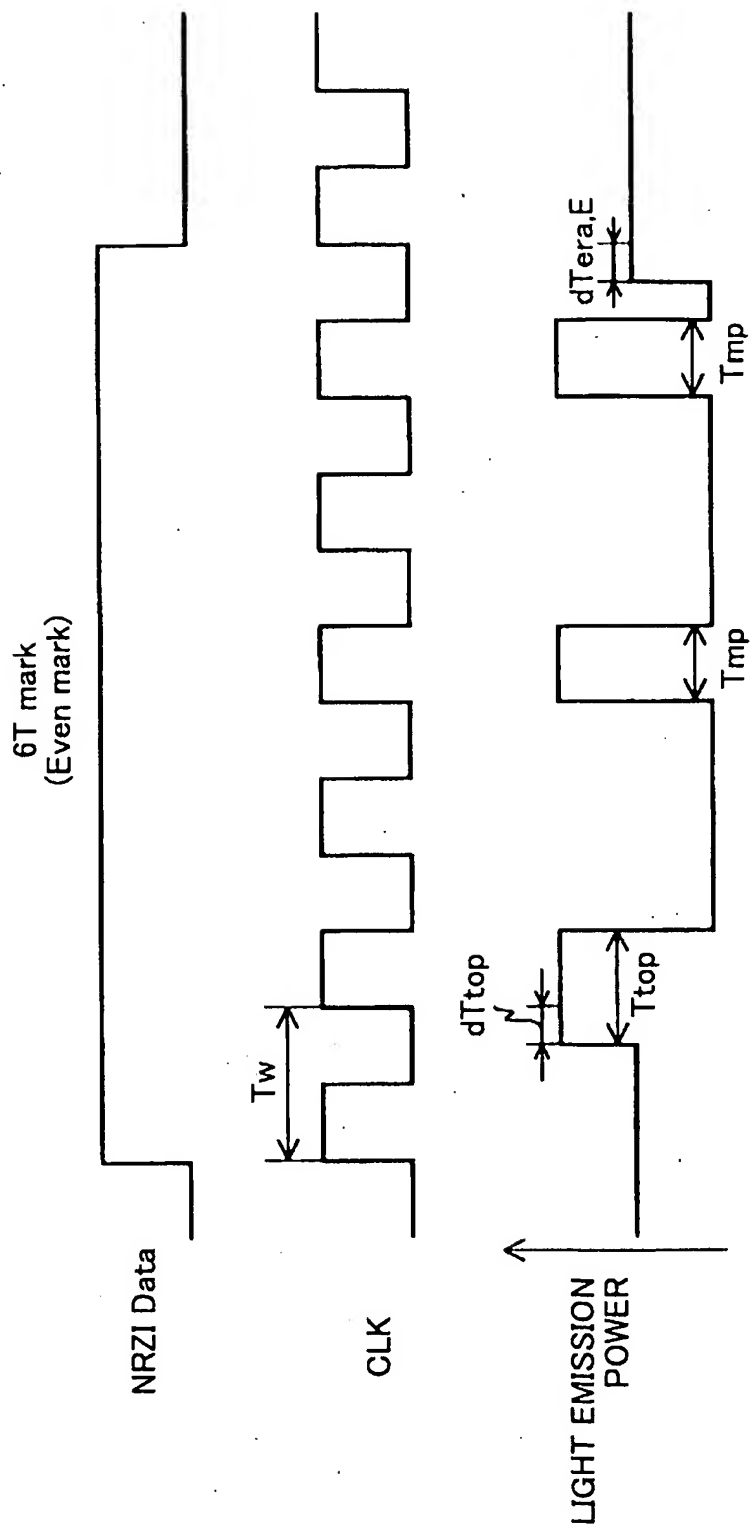

7/15

FIG.5

7T mark  
(Odd mark)

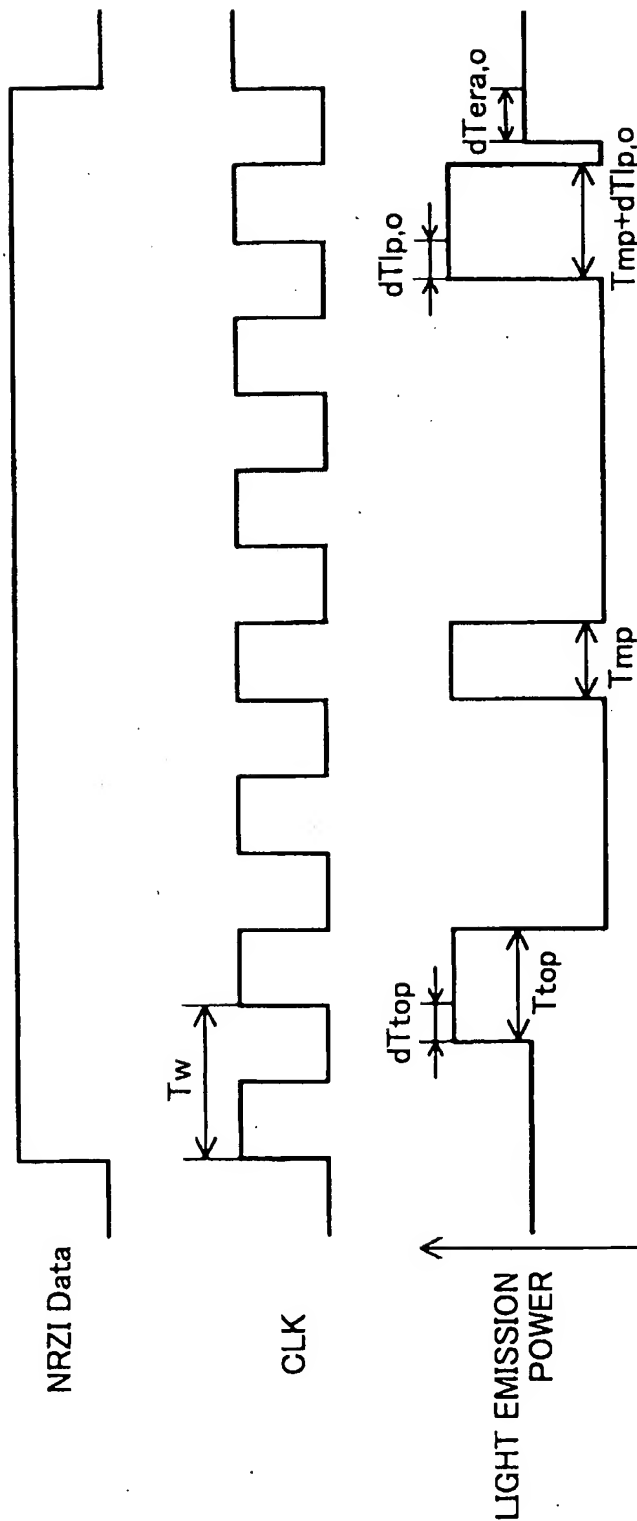


8/15

FIG.6

PARAMETER	L0	L1
OPTIMUM WRITE POWER (P <sub>w</sub> )	42mW	50mW
P <sub>e</sub> /P <sub>w</sub>	0.4	0.43
T <sub>mp</sub>	0.56	0.63
T <sub>top</sub>	0.50	0.56
dT <sub>top</sub>	0.00	0.00
T <sub>3</sub>	0.75	0.81
dT <sub>top,3</sub>	-0.13	-0.13
dT <sub>era,3</sub>	0.25	0.13
dT <sub>top,4</sub>	0.00	0.00
dT <sub>era,E</sub>	0.38	0.38
dT <sub>top,5</sub>	0.00	0.00
dT <sub>lp,o</sub>	0.00	0.06
dT <sub>era,o</sub>	0.38	0.38



FIG.7

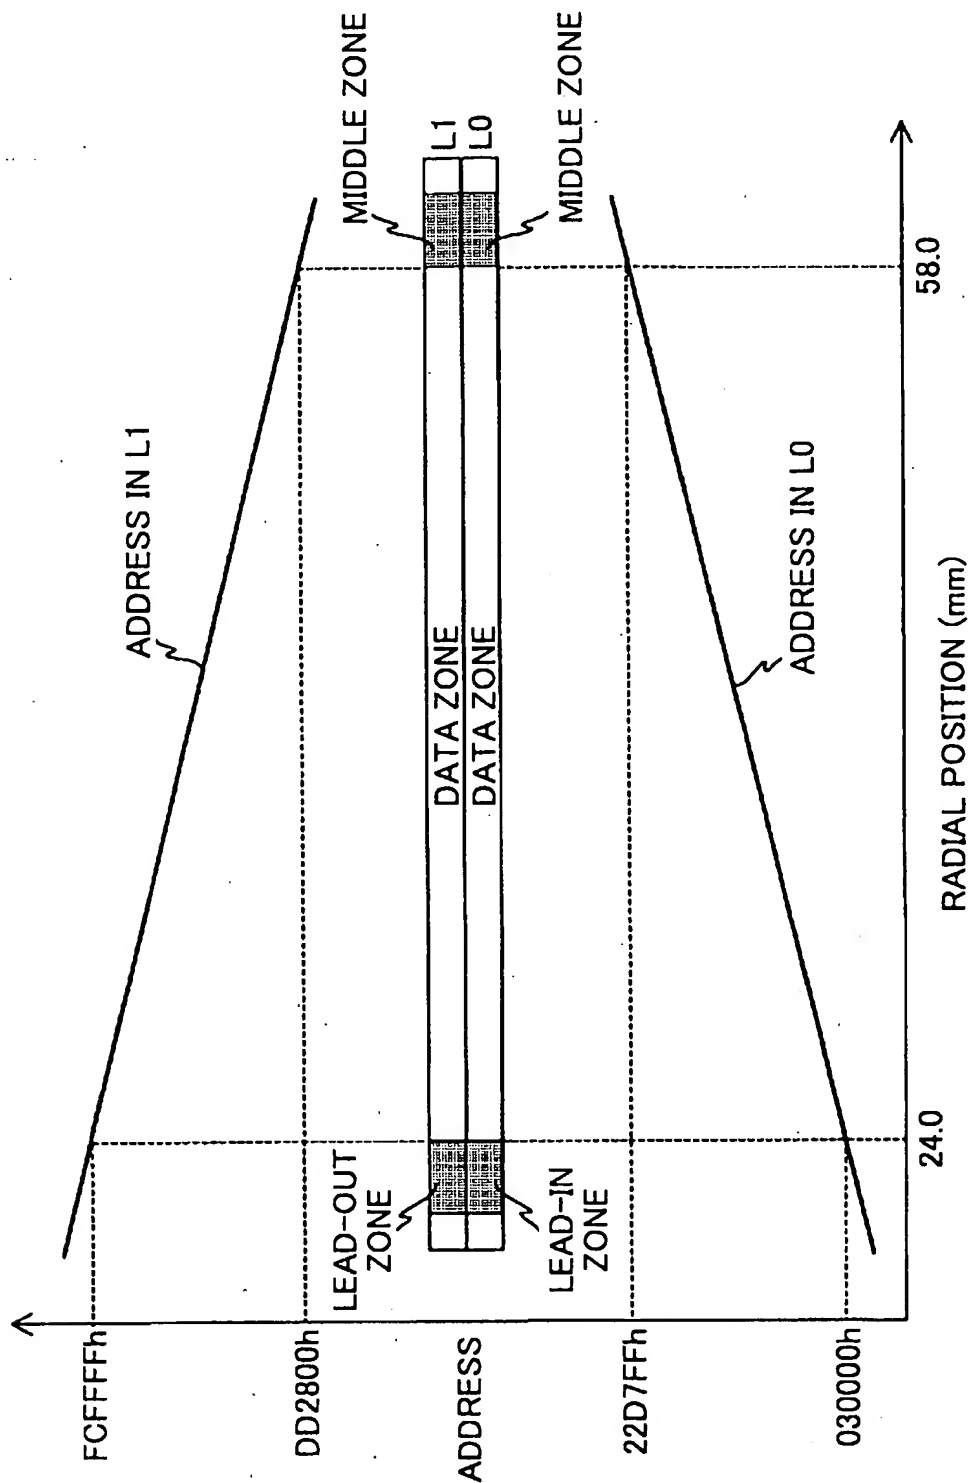

10/15

FIG.8



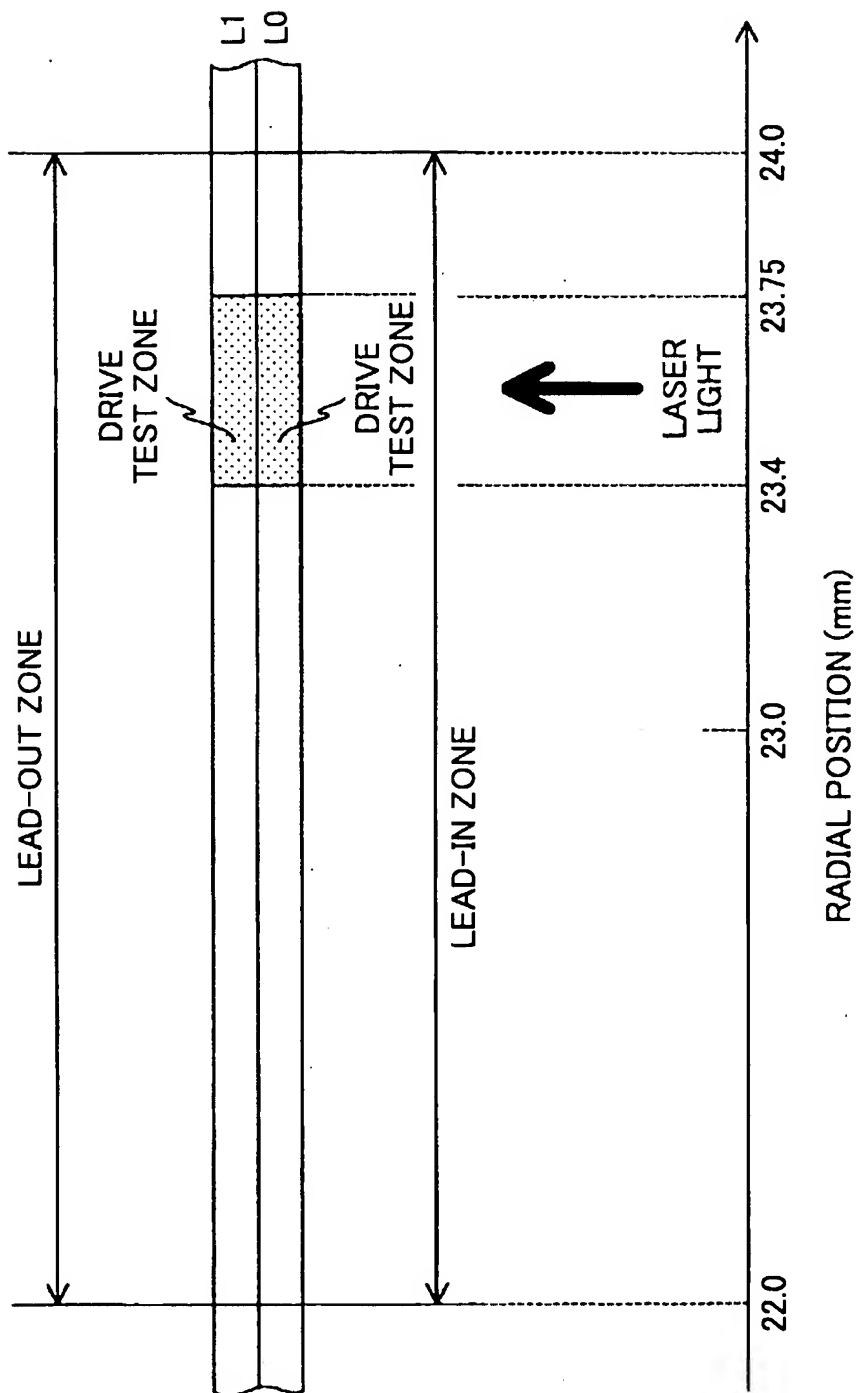


FIG.9

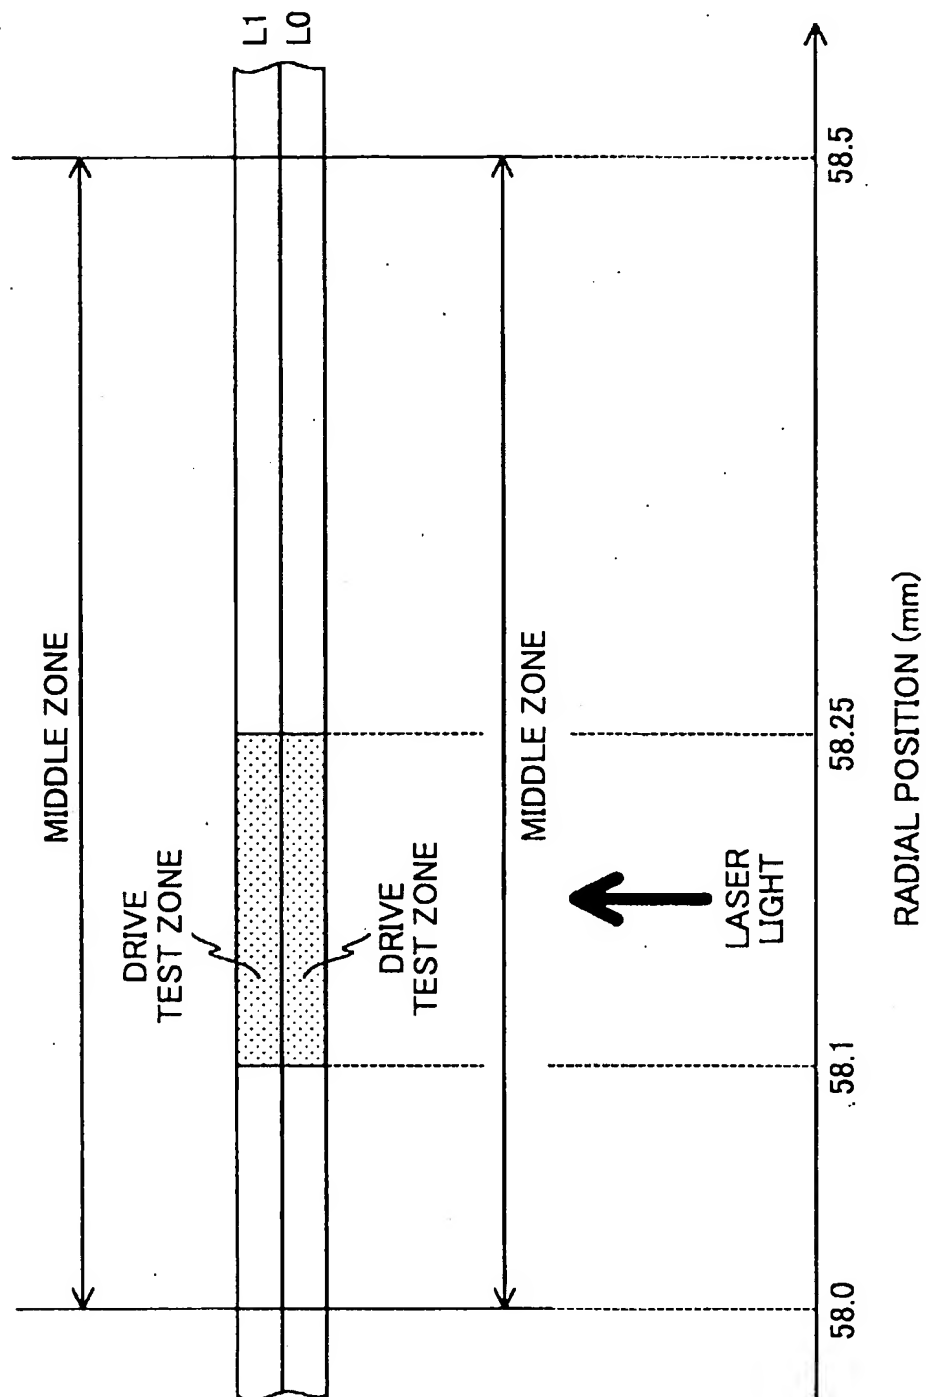


12/15

FIG.10

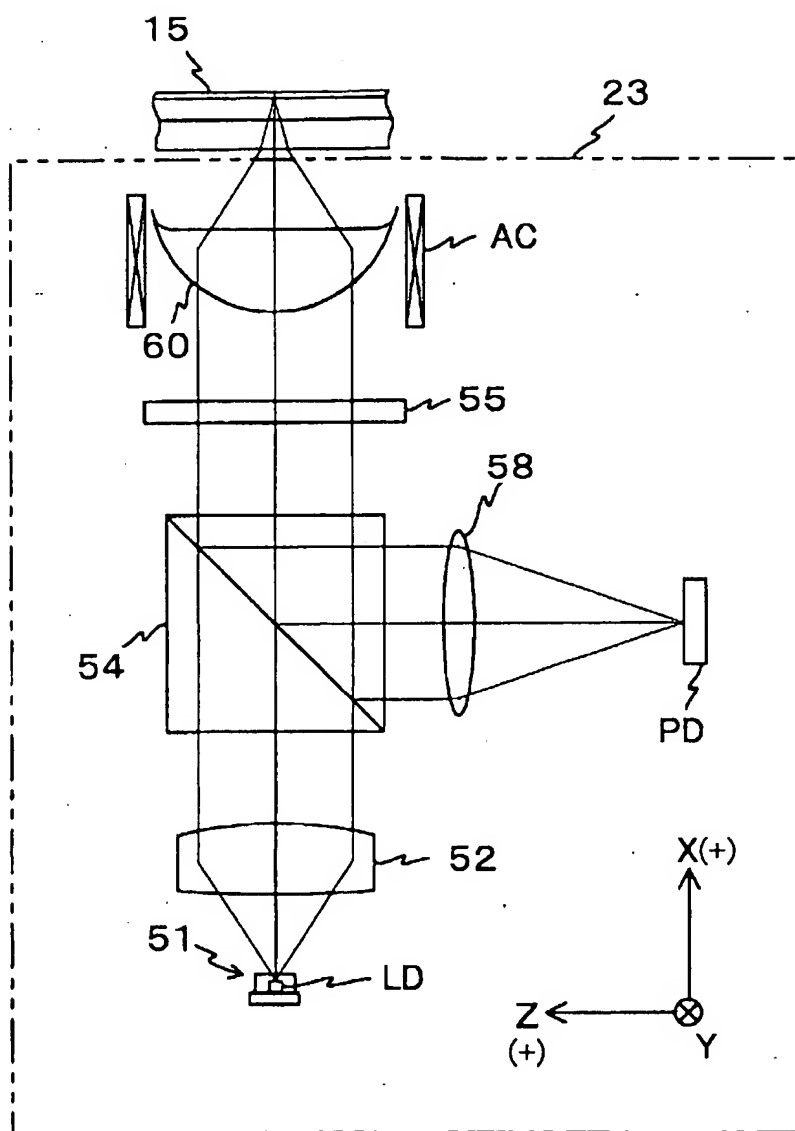

13/15

FIG.11

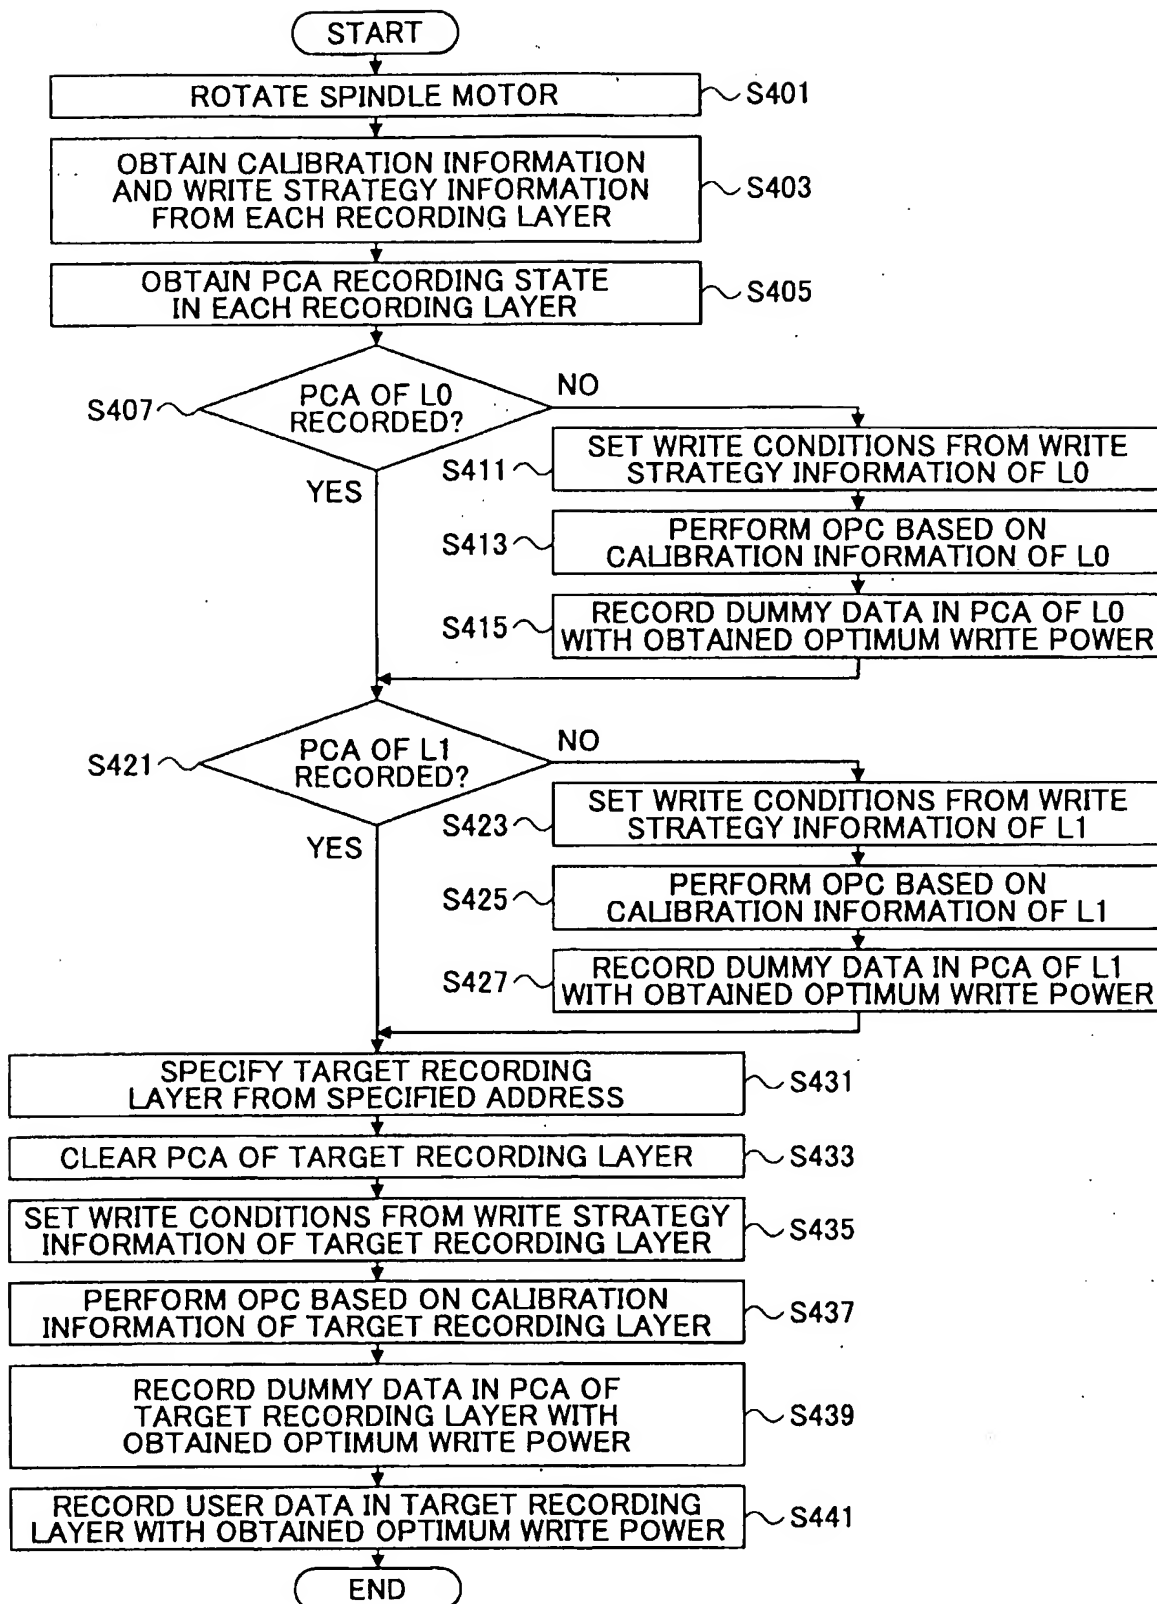

14/15

FIG.12


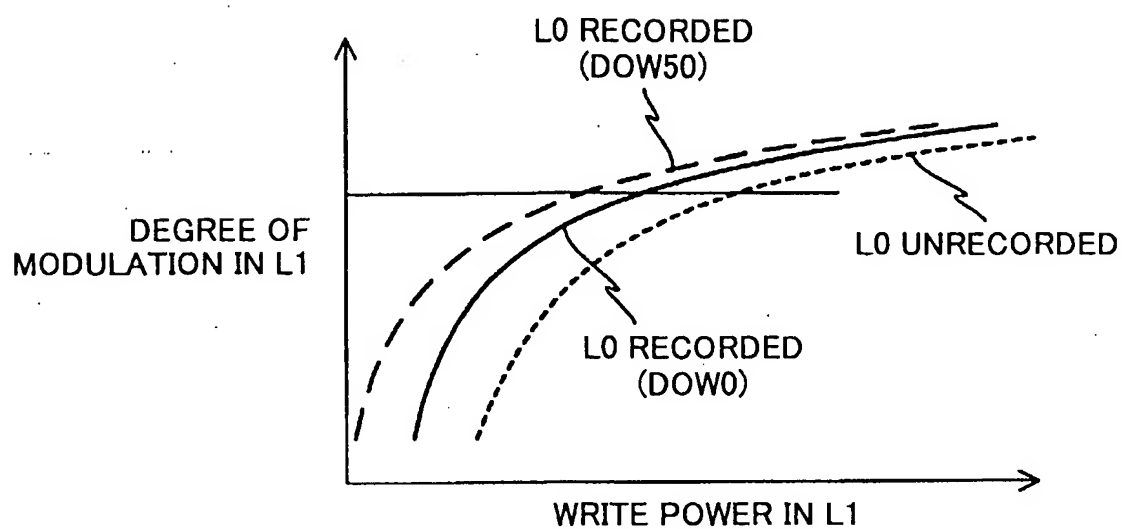


FIG.13



15/15

FIG.14

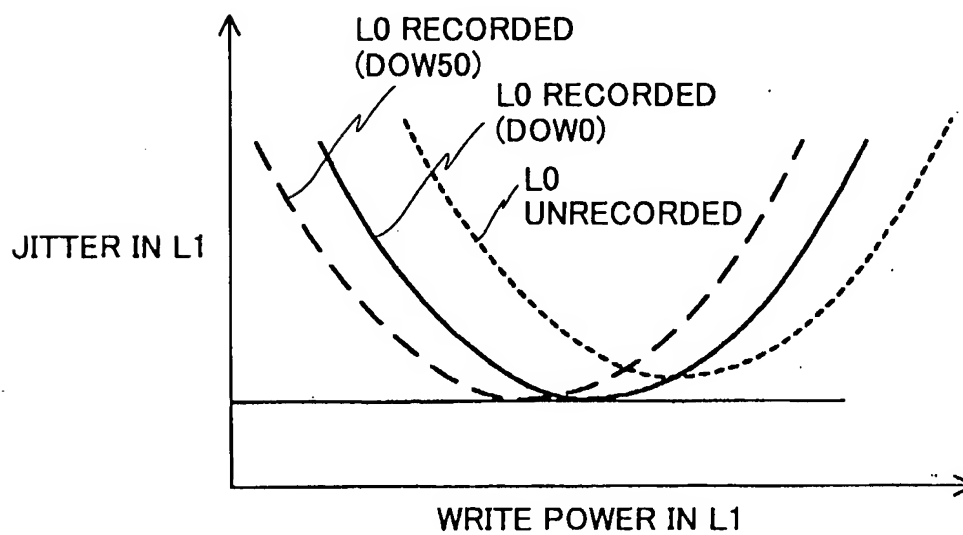